

wiper[®]

SHOWER DRAINS





CLASSIC

CLASSIC is a series of linear shower drains without a flange, to be installed in the floor without an insulating layer. It comprises of a drain body 30 mm deep, 84 mm wide and a grating which are all made of stainless steel. Length can be, in fact, unlimited. The product is available in different finishes to meet particular needs and expectations of customers.

10 YEAR GUARANTEE

new



available
with siphon
SNAKE
height 45mm



no flange



surface finishes



POLISHED



BRUSHED
(SATIN)



MATT

standard lengths


[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200

water flow capacity:


Q [l/min] : 26 – EN1253 36 (with SNAKE)

40 – EN274 50 (with SNAKE)


for this product you can also buy:
TANKING KIT, ADJUSTABLE LEGS TYPE 1



PURE

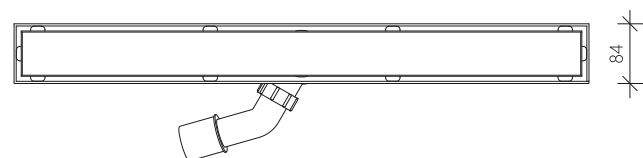


TIVANO, ZONDA, MISTRAL, SIROCCO PONENTE

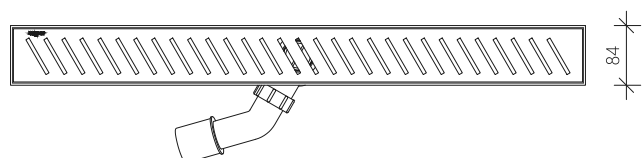

3/EN

CLASSIC

TIVANO



ZONDA



MISTRAL



SIROCCO



PURE



PONENTE



EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL



PREMIUM

PREMIUM is a series of WIPER linear shower drains that incorporate a flange, to be installed in the floor with an insulating layer. A textile sealing membrane is available as an optional extra for easier installation. The product comprises of a drain body 30 mm deep, 84 mm wide and a grating which are all made of stainless steel. Length can be, in fact, unlimited. The product is available in various types to meet particular needs and expectations of customers.



new



available
with siphon
SNAKE
height 45mm

flange



surface finishes



POLISHED



BRUSHED
(SATIN)



MATT

standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200


water flow capacity:

Q [l/min] : 26 – EN1253 **36 (with SNAKE)**

40 – EN274 **50 (with SNAKE)**

for this product you can also buy:


TANKING KIT, SEALING MEMBRANE, ADJUSTABLE LEGS TYPE 1

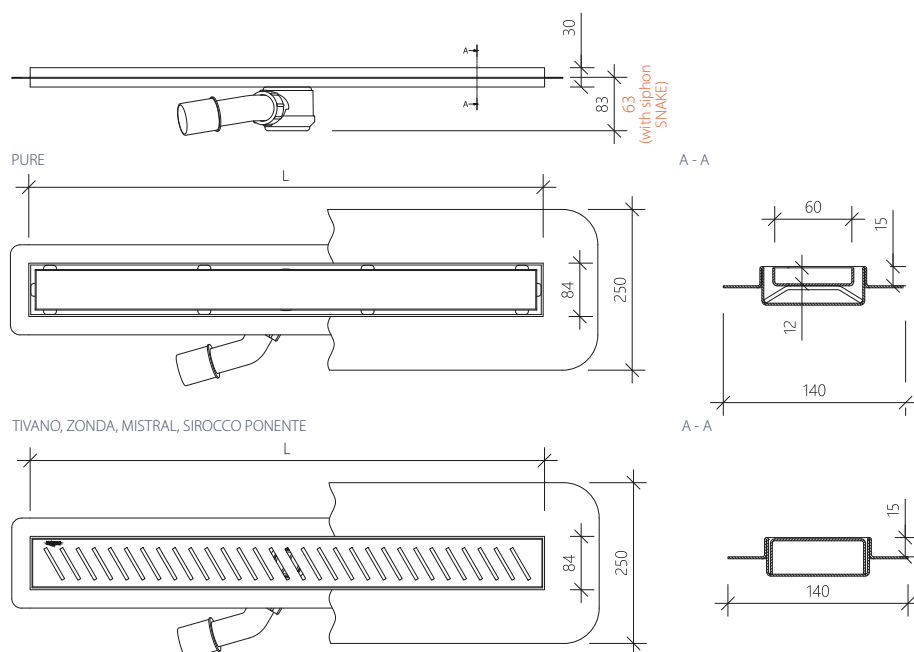

5/EN

PREMIUM

TIVANO



ZONDA



MISTRAL




SIROCCO



PURE



PONENTE



EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STEEL



100% RESISTANCE

The Wiper logo, consisting of the word "wiper" in a stylized, lowercase font inside a rounded rectangular border.

PREMIUM SLIM

PREMIUM SLIM is a series of WIPER linear shower drains, to be installed in the floor with an insulating layer. A textile sealing membrane is available as an optional extra for easier installation. The product comprises of a drain body and a 58 mm wide grating which are all made of stainless steel. Length can be, in fact, unlimited. The drain features a new patented SMART TRAP® stainless steel trap with a capacity of 38 l/min and the EASY CLEAN system. The product is available in various types to meet particular needs and expectations of customers.

A circular seal with a dashed border. Inside the circle, the text "10 YEAR GUARANTEE" is written in a bold, sans-serif font, oriented diagonally from the bottom left to the top right.

10 YEAR GUARANTEE

7/EN

PREMIUM SLIM



flange



steel siphon



surface finishes



POLISHED

BRUSHED
(SATIN)

MATT

system EASY CLEAN


water flow capacity:

Q [l/min] : 38 – EN1253


standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200for this product you can also buy:
TANKING KIT, SEALING MEMBRANE, ADJUSTABLE LEGS TYPE 4


A - A

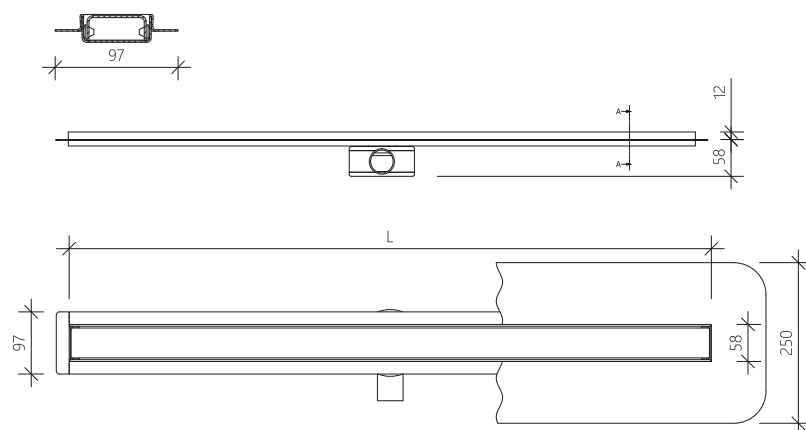

MISTRAL

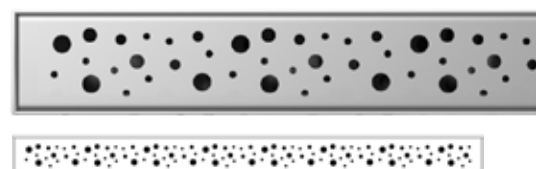

SIROCCO

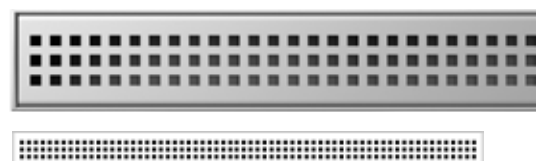

PURE



PONENTE



EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL



100% RESISTANCE

The Wiper logo, featuring the word "wiper" in a stylized, lowercase font inside a rounded rectangular border.

S-LINE



S-line is a novel solution allowing free design of floor drainage shape. The product can be installed around jacuzzies, curvy pools or along any object, offering a unique architectural effect. The product is available in various types to meet particular needs and expectations of customers.

10 YEAR GUARANTEE

S-LINE PREMIUM

flange



S-LINE CLASSIC

no flange



surface finishes



POLISHED



BRUSHED (SATIN)



MATT

new



available
with siphon
SNAKE

height 45mm

water flow capacity:

Q [l/min]: 26 – EN1253 36 (with SNAKE)


40 – EN274 50 (with SNAKE)

for this product you can also buy:
TANKING KIT

9/EN

S-LINE

TIVANO



ZONDA



MISTRAL




SIROCCO



PURE



PONENTE

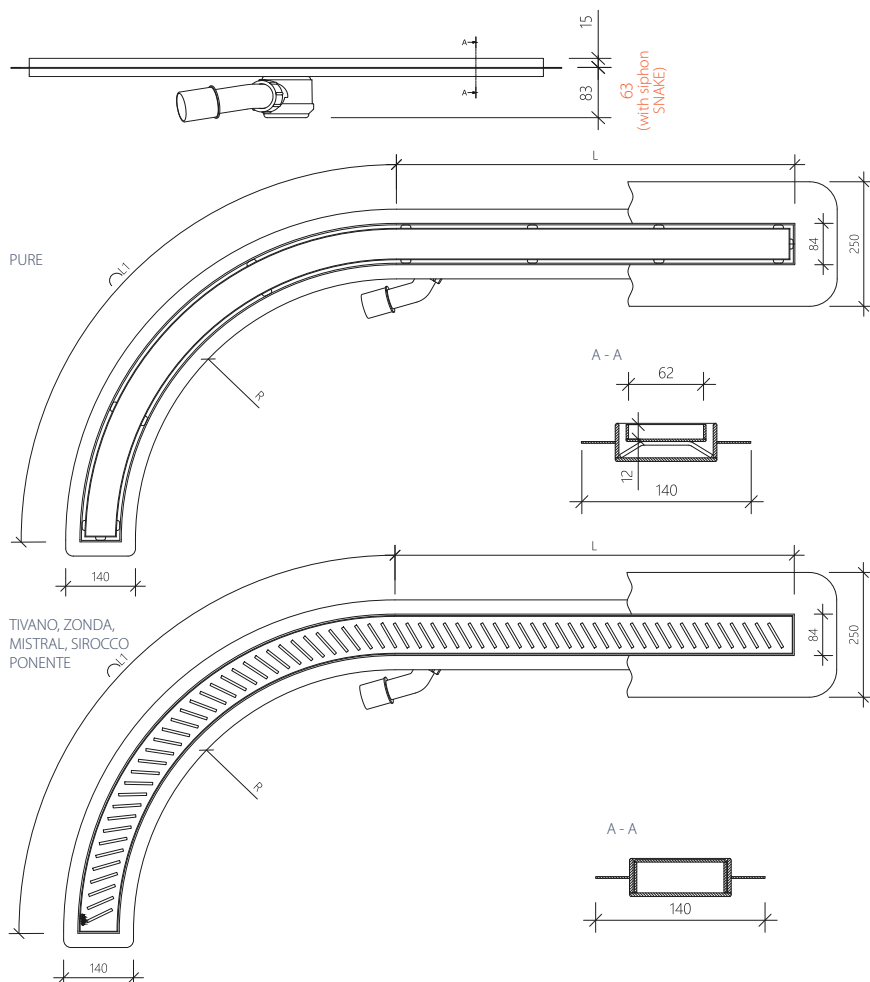

EASY INSTALLATION



GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL



100% RESISTANCE

The Wiper logo, featuring the word "wiper" in a stylized, lowercase font inside a rounded rectangular border.

INVISIBLE

INVISIBLE shower channel concept is a visually minimalistic version of a linear drain. Once installed the channel is 100% invisible. The only visible features are the gaps in the floor through which the water drains. We recommend this solution for floors made of materials which can be aesthetically finished after cutting (e.g. gres or granite). Included is a special degreasing cloth to clean the steel surfaces before gluing the finished floor surface.

A circular stamp with a distressed, ink-like texture. Inside the circle, the text "10 YEAR GUARANTEE" is written in a bold, sans-serif font, oriented horizontally across the middle of the circle.

10 YEAR GUARANTEE


new



available
with siphon
SNAKE
height 45mm



flange

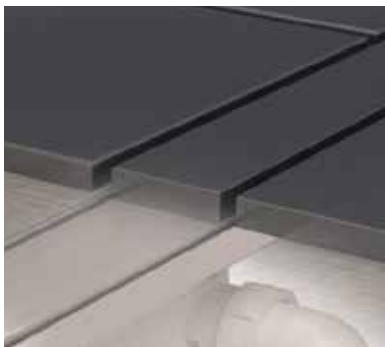

water flow capacity:


Q [l/min] : 26 – EN1253 36 (with SNAKE)

40 – EN274 50 (with SNAKE)

standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200

for this product you can also buy:
TANKING KIT, SEALING MEMBRANE, ADJUSTABLE LEGS TYPE 1

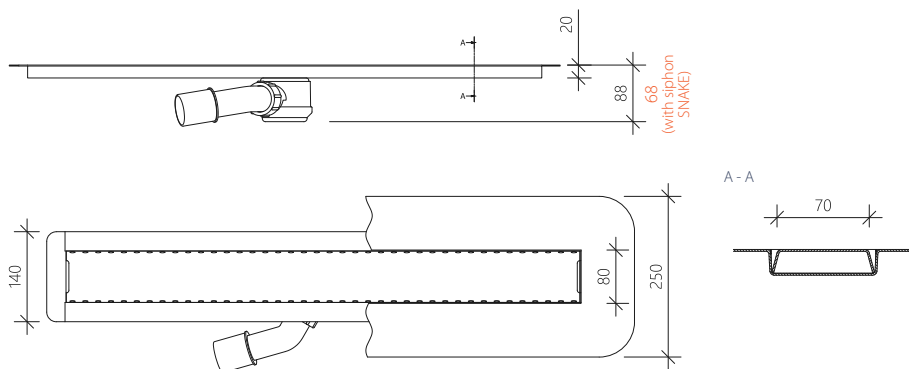

11/EN

INVISIBLE


EXOTIC WOOD



MARBLE



GRANIT

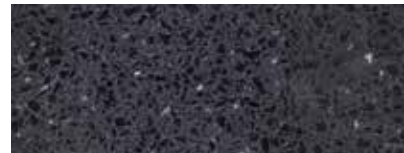

GRES



HARDENED GLASS



VINYL FLOOR



DRAIN PERFECT FOR USE WITH*:

*The manufacturer provides only the drain.
The solutions referred to above are only
demonstrative propositions.



EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL




100% RESISTANCE

The Wipac logo is located in the top left corner of the image. It consists of the word "Wipac" in a white, sans-serif font, enclosed within a white rectangular border. The background of the entire page is a photograph of a modern bathroom interior. It features a glass shower enclosure on the left, a white bathtub on the right, and a light-colored tiled floor. A large window in the background shows a view of the ocean. The overall aesthetic is clean and minimalist.

Wipac

INVISIBLE SLIM

INVISIBLE SLIM shower channel concept is a visually minimalistic version of a linear drain. Once installed the channel is 100% invisible. The only visible features are the gaps in the floor through which the water drains. We recommend this solution for floors made of materials which can be aesthetically finished after cutting (e.g. gres or granite) The drain features a new patented SMART TRAP® stainless steel siphon/trap with a capacity of 38 l/min and the EASY CLEAN system.

A circular seal with a distressed, stamp-like texture. Inside the circle, the text "10 YEAR GUARANTEE" is written in a bold, sans-serif font. The seal is positioned in the bottom right corner of the image, partially overlapping the shower floor and the bathtub.

10 YEAR GUARANTEE

13/EN

INVISIBLE SLIM



EXOTIC WOOD



MARBLE



GRANIT



GRES



HARDENED GLASS




VINYL FLOOR



*The manufacturer provides only the drain.
The solutions referred to above are only
demonstrative propositions.

DRAIN PERFECT FOR USE WITH*:

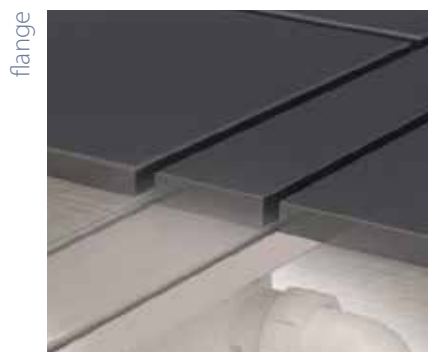

flange



steel siphon


standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200

system EASY CLEAN

water flow capacity:
Q [l/min] : 38 – EN1253

for this product you can also buy:
TANKING KIT, SEALING MEMBRANE, ADJUSTABLE LEGS TYPE 4

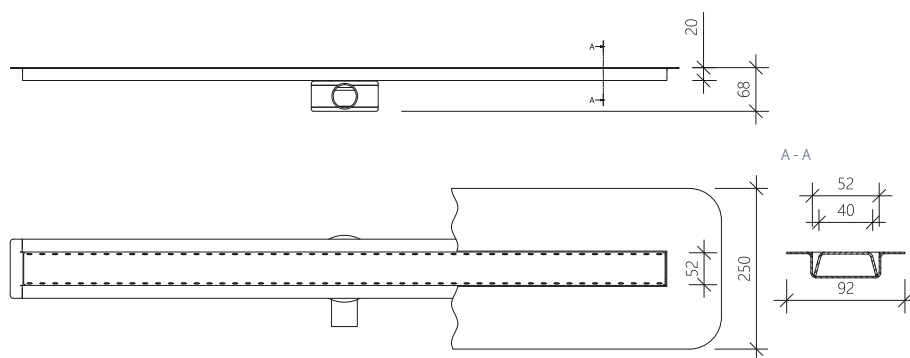

EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL



100% RESISTANCE

The Wiper logo is located in the top left corner of the image. It consists of the word "wiper" in a lowercase, sans-serif font, enclosed within a rectangular border.

ELITE

ELITE is a series of WIPER linear shower drains that incorporate a flange, to be installed in the floor with an insulating layer. ELITE drains are characterized by adjustable frame height, 8–12 mm (optional: 50 mm for thick flooring). The width of the grating is 34 mm. The product is available in different finishes to meet particular needs and expectations of customers.

A circular stamp with a distressed, ink-like texture is positioned in the bottom left corner. Inside the circle, a rectangular banner contains the text "10 YEAR GUARANTEE" in a bold, uppercase, sans-serif font.

10 YEAR GUARANTEE

new



flange



surface finishes



POLISHED



BRUSHED
(SATIN)



MATT

standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200

water flow capacity:


Q [l/min] : 26 – EN1253 36 (with SNAKE)

40 – EN274 50 (with SNAKE)

15/EN

ELITE

TIVANO



ZONDA



MISTRAL





SIROCCO



PURE



PONENTE

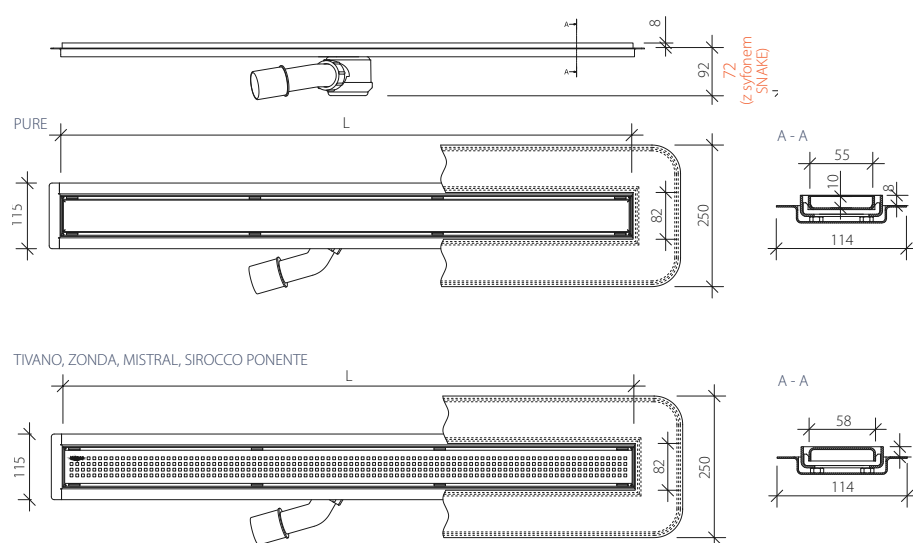

EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL



100% RESISTANCE

The Wiper logo is located in the top left corner of the image. It consists of the word "wiper" in a white, lowercase, sans-serif font, enclosed within a white rectangular border. The background of the entire page is a photograph of a modern bathroom interior. A large, rectangular, chrome-finished linear shower drain is installed in a light-colored, reflective floor. The drain has a long, narrow, rectangular grating. In the background, a glass shower door is visible, reflecting the surrounding environment. A circular stamp with the text "10 YEAR GUARANTEE" is overlaid on the image, positioned above the drain. The text "ELITE SLIM" is written vertically in large, white, sans-serif capital letters along the right side of the image. In the bottom left corner, there is a circular gold medal emblem with the text "ZŁOTY MEDAL 2015" and a stylized "ETD" logo.


ELITE SLIM

ELITE SLIM is a series of WIPER linear shower drains, that incorporate a flange, particularly useful when a perfect seal is necessary. ELITE SLIM drains are characterized by: low building height – 64 mm up to the flange, adjustable frame height, 8–12 mm (optional: 50 mm for thick flooring), modern design – the width of the grating is only 34 mm (frame 48 mm). ELITE SLIM drains feature a new patented SMART TRAP® stainless steel siphon/trap with a capacity of 38 l/min and the EASY CLEAN system.





flange

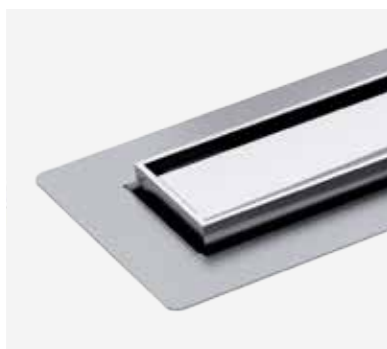

steel siphon



standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200

surface finishes



POLISHED

BRUSHED
(SATIN)

MATT

system EASY CLEAN

water flow capacity:

Q [l/min] : 38 – EN1253

for this product you can also buy:
TANKING KIT, SEALING MEMBRANE, ADJUSTABLE LEGS TYPE 4


SIROCCO



PURE



PONENTE

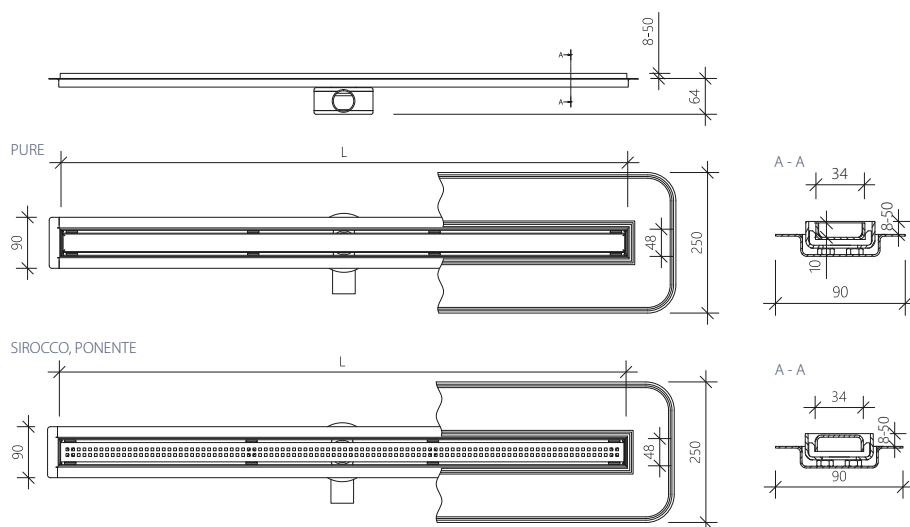

EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL




100% RESISTANCE

The Wipea logo is located in the top left corner of the image. It consists of the word "wipea" in a lowercase, sans-serif font, enclosed within a rounded rectangular border.

EYE-DRAIN



EYE-DRAIN is a drain type with a completely new and fresh shape - its soft and slim lines allow for creating unparalleled visual effects, while ensuring utmost functionality, practically and unlimited lifecycle. It is a novel concept of a PREMIUM shower drain. It is perfectly suitable for using mosaic tiles and surfaces of large stone slabs. Sealing membrane included.

A circular seal with a distressed, metallic texture. Inside the circle, the text "10 YEAR GUARANTEE" is written in a bold, sans-serif font. The seal is positioned in the bottom right corner of the image, overlapping the shower floor and the wooden wall paneling.


10 YEAR GUARANTEE

19/EN

EYE-DRAIN



flange

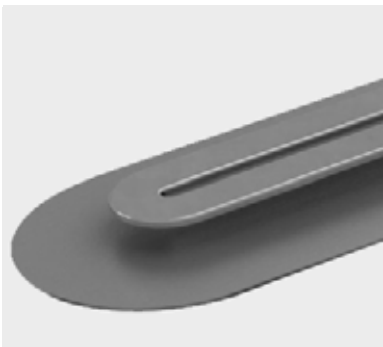

surface finishes



POLISHED

BRUSHED
(SATIN)



MATT

standard lengths

[mm] 500, 600, 700, 800, 900,
1000, 1100, 1200

water flow capacity:


Q [l/min] : 36 – EN1253

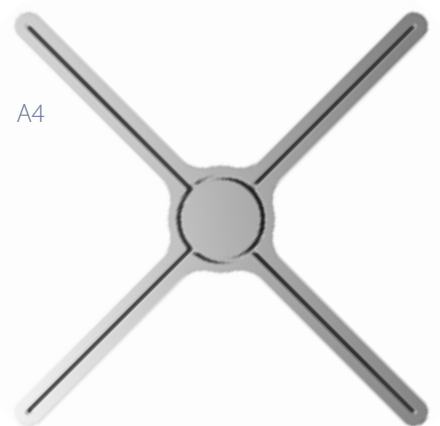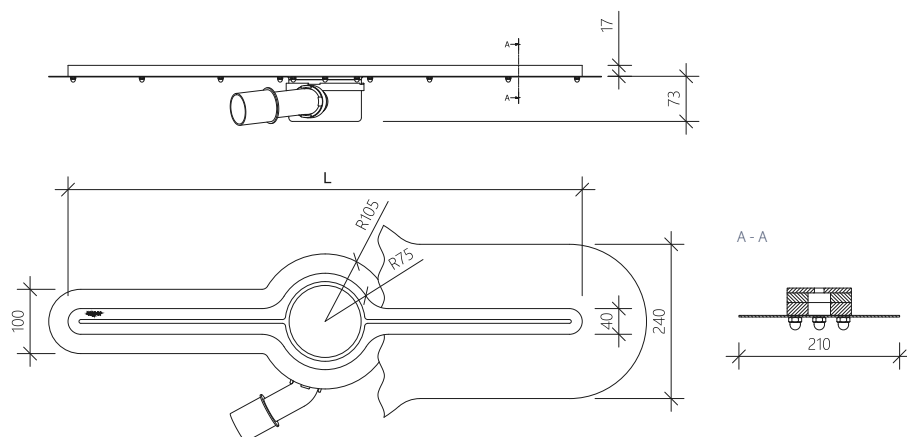for this product you can also buy:
TANKING KIT

A4



A2L

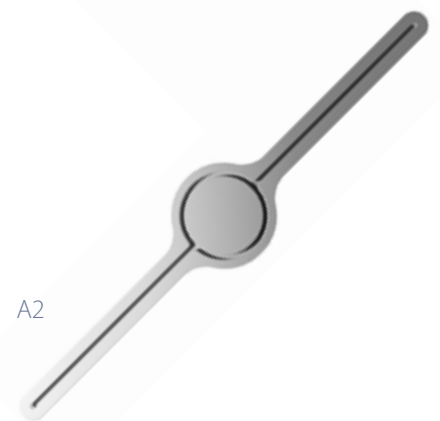

A2



A1



A0



EASY INSTALLATION



GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY




CLEANABLE



STAINLESS STEEL



100% RESISTANCE

The Wiper logo, featuring the word "wiper" in a stylized, lowercase font inside a rectangular border.


WP CLASSIC

WP CLASSIC is a series of WIPER point outlets without a flange, to be installed in the floor without an insulating layer. The top surface of the drain is 3 mm stainless steel consisting of the frame and grating. The product has many variations making it very flexible to suit all possible situations in the shower.





no flange

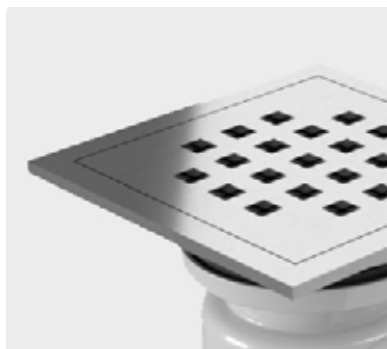

measurements

WP100 – 100 x 100 mm

WP120 – 120 x 120 mm

WP150 – 150 x 150 mm

surface finishes





POLISHED

BRUSHED
(SATIN)

MATT

for this product you can also buy:
TANKING KIT, ADJUSTABLE LEGS TYPE 1

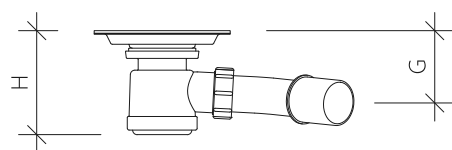

water flow capacity:



TYPE	H [mm]	G [mm] ¹⁾	Q [l/min] ²⁾
WP100 WP120	88	68	26/50
WP150 N ³⁾	88 (133-PURE)	68 (86-PURE)	26/50
WP150 F ³⁾	80 (98-PURE)	48 (66-PURE)	36/-

1. Average dimension (adjustable by rotating outlet tube)


2. EN1253 / EN274

3. Syphon N Ø50; syphon F Ø90



TIVANO





ZONDA



MISTRAL






SIROCCO



PURE



PONENTE



EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL

The Wiper logo, featuring the word "wiper" in a lowercase, sans-serif font inside a rounded rectangular border.

WP PREMIUM


WP PREMIUM is a series of WIPER point outlets that incorporate a flange to be installed in the floor with an insulating layer. A textile sealing membrane is available as an optional extra for easier installation. The top surface of the drain is 3 mm stainless steel consisting of the frame and grating. The product has many variations making it very flexible to suit all possible situations in the shower.

A circular seal with a distressed, metallic texture. Inside the circle, the text "10 YEAR GUARANTEE" is written in a bold, sans-serif font.

10 YEAR GUARANTEE



Flange

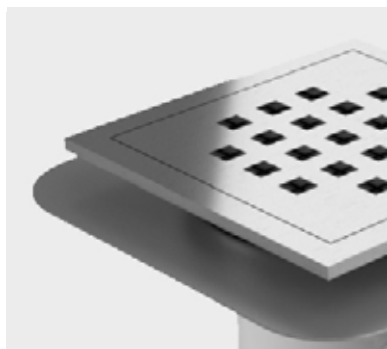

measurements

WP100 – 100 x 100 mm

WP120 – 120 x 120 mm

WP150 – 150 x 150 mm

surface finishes





POLISHED

BRUSHED
(SATIN)

MATT

for this product you can also buy:
TANKING KIT, SEALING MEMBRANE, ADJUSTABLE LEGS TYPE 1

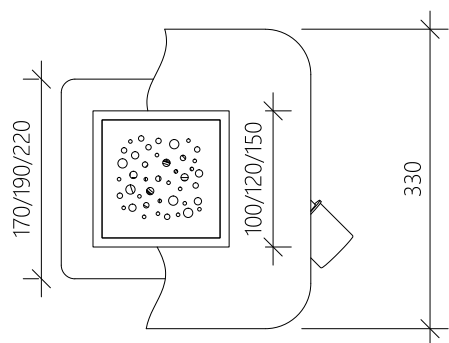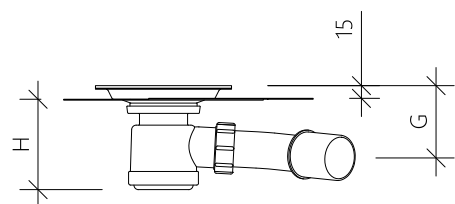

water flow capacity:



TYPE	H [mm]	G [mm] ¹⁾	Q [l/min] ²⁾
WP100 WP120	88	68	26/50
WP150 N ³⁾	88 (133-PURE)	68 (86-PURE)	26/50
WP150 F ³⁾	80 (98-PURE)	48 (66-PURE)	36/-

1. Average dimension (adjustable by rotating outlet tube)


2. EN1253 / EN274

3. Syphon N Ø50; syphon F Ø90



TIVANO





ZONDA



MISTRAL





SIROCCO



PURE



PONENTE



EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY




CLEANABLE



STAINLESS STEEL



100% RESISTANCE



WIPER TOP

WIPER TOP is a gulley with a square cover and frame 122x122 mm made of stainless steel. This gulley is equipped with a McAlpine non-return valve (dry trap) and has a flow rate 32 l/min. The discharge outlet pipe is suitable for 40 mm and 50 mm diameter pipes. The height of the drain is 143 mm. It is possible to additionally order a perforated sealing membrane and/or a screw fixed stainless steel flange.



10 YEAR GUARANTEE

25/EN


WIPER TOP





TIVANO





ZONDA




MISTRAL



SIROCCO



BREVA



dedicated sealing membrane
and steel flange



measurements:

[mm] 122 x 122

water flow capacity:

Q [l/min] : 32 – EN1253

surface finishes







POLISHED

BRUSHED
(SATIN)

MATT

for this product you can also buy:
SEALING MEMBRANE, STEEL FLANGE, TANKING KIT

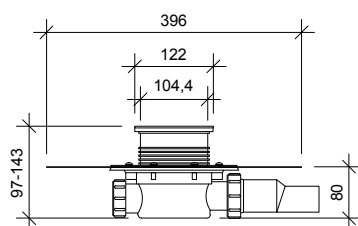

EASY INSTALLATION




GOOD QUALITY



DURABILITY



120°C



LOW HEIGHT



CAPACITY



CLEANABLE



STAINLESS STEEL



100% RESISTANCE



SHOWERLAY



SHOWERPLAYS – floor plates produced from XPS foam, covered both sides in a cementous glue with reinforcing net. They include a linear drain or point outlet complete with a McAlpine trap. The advantages of using a Showerlay are that they come complete with a built in slope, are completely waterproof and have a ready-to-tile surface providing superb adhesion. They are very strong and stable but can be easily cut around pipes etc. They have excellent sound insulation and compressive strength meaning that even small mosaic tiles can be used. Great for use in concrete floors but are perfect for wooden floors when strength and flexibility are paramount and because height is always an issue, they can be produced at 20/30/40 mm thick.








Properties of SHOWERLAY prefabricated plates are:

- 100% waterproof
- shaped slope towards the drain channel (or point outlet)
- excellent adhesion of glue to the surface layer
- hardness of the surface layer allows to cement even very small mosaics
- high acoustic insulation
- plate thickness 20, 30 or 40 mm
- before installation, the plates should be supported over the entire surface
- other sizes and drain layouts made for individual orders

In order to specify the order, please provide the following information:

1. thickness of the tray (20, 30 or 40 mm)
2. tray type (LINE – with a channel, POINT – with a point outlet)
3. tray dimensions: X, Y

for this product you can also buy:
TANKING KIT

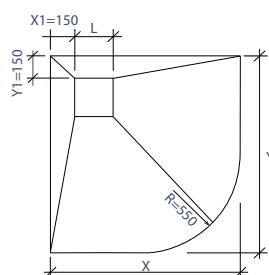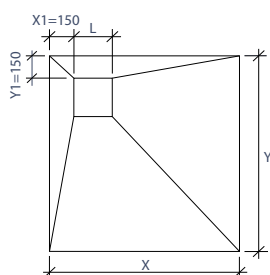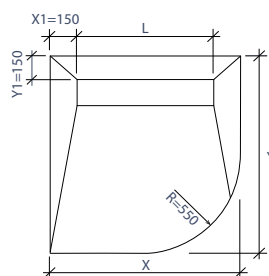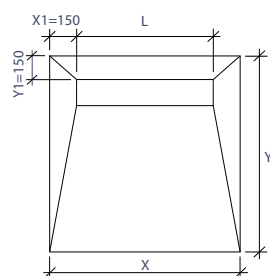


EASY
INSTALLATION




GOOD
QUALITY



DURABILITY



100%
RESISTANCE



LOW
HEIGHT




CAPACITY




CLEANABLE



STAINLESS
STEEL



SLOPE
SURFACE



HEAT
INSULATION




120°C



ACOUSTIC
INSULATION



ISOL-ONE sealing mat is made of a polyethylene film coated with a special non-woven fabric on both sides, so that it bonds well with the glue layer. Its installation is recommended in all areas that require sealing. The mat is resistant to the cracking of the substrate, ensuring the sealing of the entire surface, reduces installation time, allowing the tiles to be laid immediately after gluing the mat.

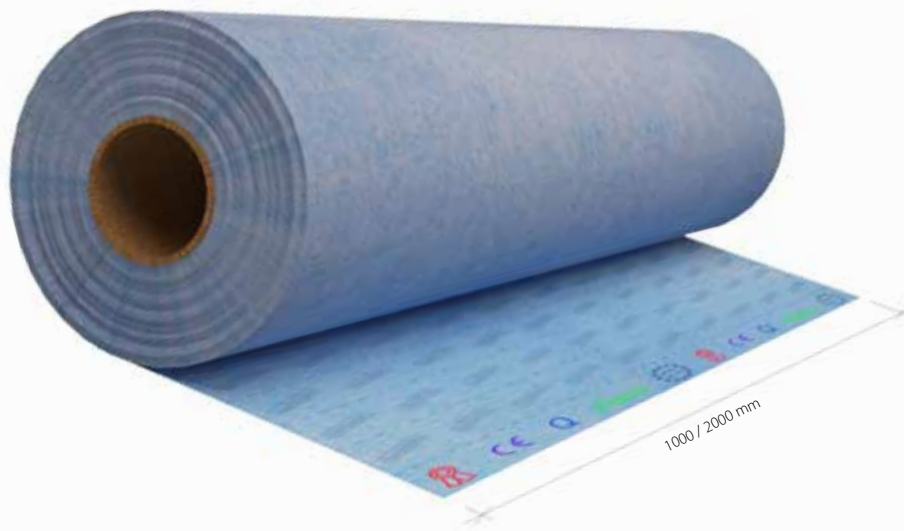

ISOL-ONE M100
ISOL-ONE M200

ISOL-ONE is made of a polyethylene film coated with a special non-woven fabric on both sides, for better bonding with the adhesive. Its installation is recommended in all areas that require sealing. ISOL-ONE mat is lightweight, flexible and resistant to decay, it ensures a uniform thickness of the sealing layer, it is resistant to cracking of the sub-strate, ensuring the sealing of the entire surface, reduces installation time, allowing the tiles to be laid immediately after gluing the mat. The mat accessories are also made of a thermoplastic elastomer coated with a nonwoven fabric on both sides. Thanks to this, they are characterized by high flexibility and resistance to aggressive media. They effectively protect the corners, edges, cracks in the substrate and the penetrations by pipes against moisture, forming flexible and durable connections.

PROPERTIES:

- water proof product,
- ductile product,
- small crack bridging product,
- product ready for use,
- fast to install meaning no delays

ADVANTAGES:

- they bind with all tile laying systems,
- they seal corner joints in wet areas, forming flexible and durable connections

APPLICATION:


- indoor and outdoor,
- for walls and floors,
- for wet areas, such as: bathrooms, showers in apartments, hotels and buildings
- utilities (moisture load class A01, A02, A1, A2),
- for balconies, terraces
- for use on moisture sensitive substrates, e.g.: gypsum plaster, plaster board, wooden particle boards,
- for use on absorbent mineral substrates, e.g. on concrete, screed, stucco, cellular concrete, and leveling compounds

for this product you can also buy:
TANKING KIT


ISOL-ONE T
elastic sealing tape




ISOL-ONE NZ
internal sealing corner

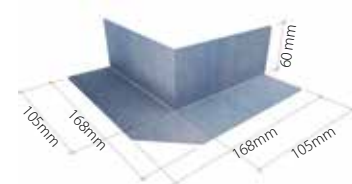

ISOL-ONE NW
external sealing corner

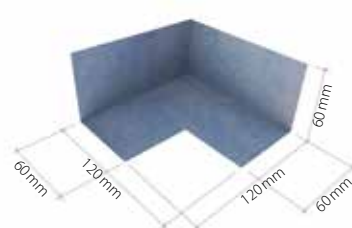

ISOL-ONE O
cuff with an elastic zone

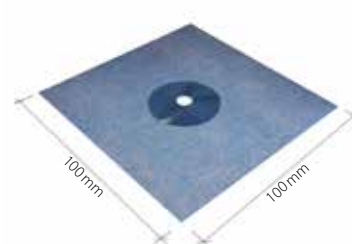



TANKING KIT

The tanking kit is used in rooms exposed to moisture, in order to water-insulate the surfaces on which ceramic plates will be laid. It is recommended in spaces requiring high-level waterproof protection due to increased moisture (e.g. in showers, bathrooms, toilets, laundries, kitchens etc.). Water insulation may be used on any type of surface: gypsum-board walls, plastered walls, walls made of gas-concrete blocks, wood-based materials, old ceramic facings, old stone facings, etc.



TANKING KIT CONTAINS:

4kg tanking liquid
1l primer
10m sealing tape
2pcs. pipe collars
2pcs. corners

TANKING LIQUID:

The tanking liquid is a ready to use, single component, solvent-free sealant mass, consisting of polymer dispersion, fillers and additives. When applied to a substrate and cured, it forms a flexible waterproofing coating. The product is intended for use inside places intended for human residence, especially in humid areas (such as bathrooms, kitchens, laundries), to perform insulation against moisture under linings and coverings, such as ceramic tiles, glazed tiles, terracotta, wooden floors and panels, and synthetic carpets.

PRIMER:

The product is intended for priming absorbent and porous surfaces, inside and outside buildings. It is especially recommended for cement - limestone plaster, airated concrete, plaster boards and cement render. The primer has a high penetration ability, is deeply absorbed into the substrate, thus strengthening it, while allowing for „breathing“. These benefits improve the structure of the substrates, which, due to the passage of time, have lost their appropriate parameters. The priming solution improves adhesion to the surface of other materials that will be used on the primed substrate. By reducing the absorbency of the substrate, the wear of the applied coating materials, emulsion paints, glues reduces as well. The solution, due to the content of the biocide and fungicide, protects the primed substrate against the formation of mold and bacteria in the product.

for this product you can also buy:
ISOL-ONE MAT




GOOD QUALITY



DURABILITY



100% RESISTANCE



EASY APPLICATION



RAPID BINDING



HIGH PERFORMANCE

	CLASSIC	PREMIUM	PREMIUM SLIM	S-LINE	INVISIBLE	INVISIBLE SLIM	ELITE	ELITE SLIM	EYE-DRAIN	WP CLASSIC	WP PREMIUM	WIPER TOP
Standard sizes	500÷1200	500÷1200	500÷1200	—	500÷1200	500÷1200	500÷1200	500÷1200	500÷1200	100x100 120x120 150x150	100x100 120x120 150x150	122x122
Custom sizes	○	○	○	●	○	○	○	○	○	—	—	—
Sealing membrane	—	○	○	○	○	○	○	○	●	—	○	○
Integrated sealing membrane	—	○	○	○	○	○	○	○	○	—	○	—
Adjustable legs type 1	○	○	—	○	○	—	—	—	—	○	○	—
Adjustable legs type 4	—	—	○	—	—	○	○	○	○	—	—	—
Siphon SNAKE	●	●	—	●	●	—	●	—	—	—	—	—
Horizontal plastic siphon	●	●	—	●	●	—	●	—	●	●	●	—
Horizontal stainless steel siphon	○	○	●	○	○	●	○	●	○	—	—	—
Vertical stainless steel siphon	○	○	○	○	○	○	○	○	○	○	○	—
Second siphon	○	○	○	○	○	○	○	○	○	—	—	—
Surface: polished/brushed/matt	●	●	●	●	●	●	●	●	●	●	●	●
Bent flange	—	○	○	○	○	○	○	○	—	—	—	—



standard



option available at extra charge



not available





We are proud to announce that WIPER are now members of the programme 'Product with Atest' of the National Institute of Public Health – National Institute of Hygiene

new

siphon SNAKE

33/EN

SIPHON SNAKE

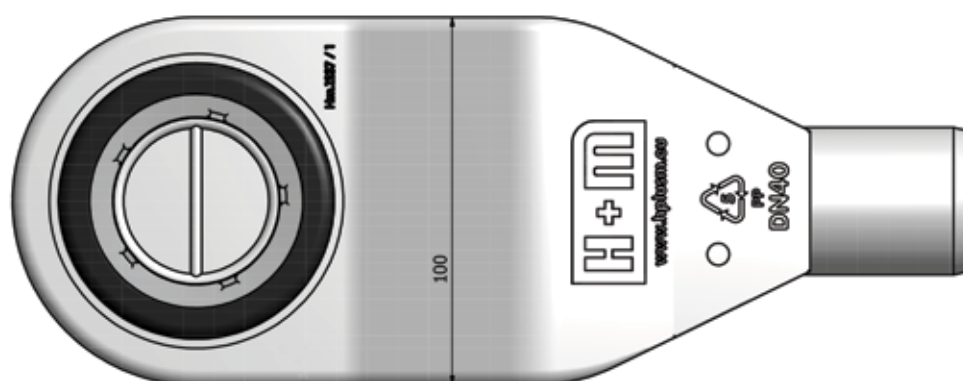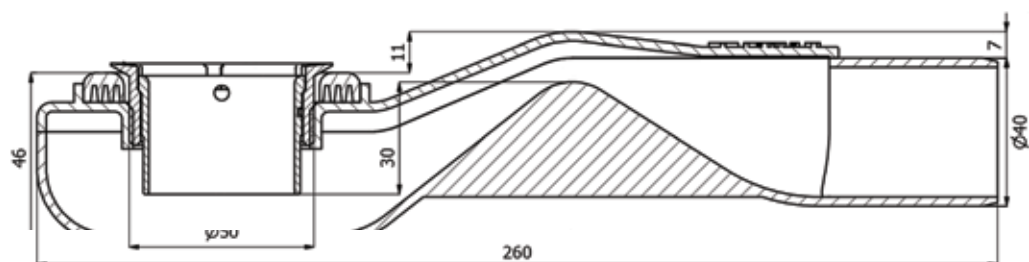

Seal

Evoprene

Filter

Stainless steel 304

Material

Hostalen PP (polypropylene 100%)

Flow rate

36 l/min according to EN 1253

Water seal

30 mm

Outlet pipe diameter

dia. 40 mm


Outlet reduction


dia. 40 mm / dia. 50 mm

Height

45 mm



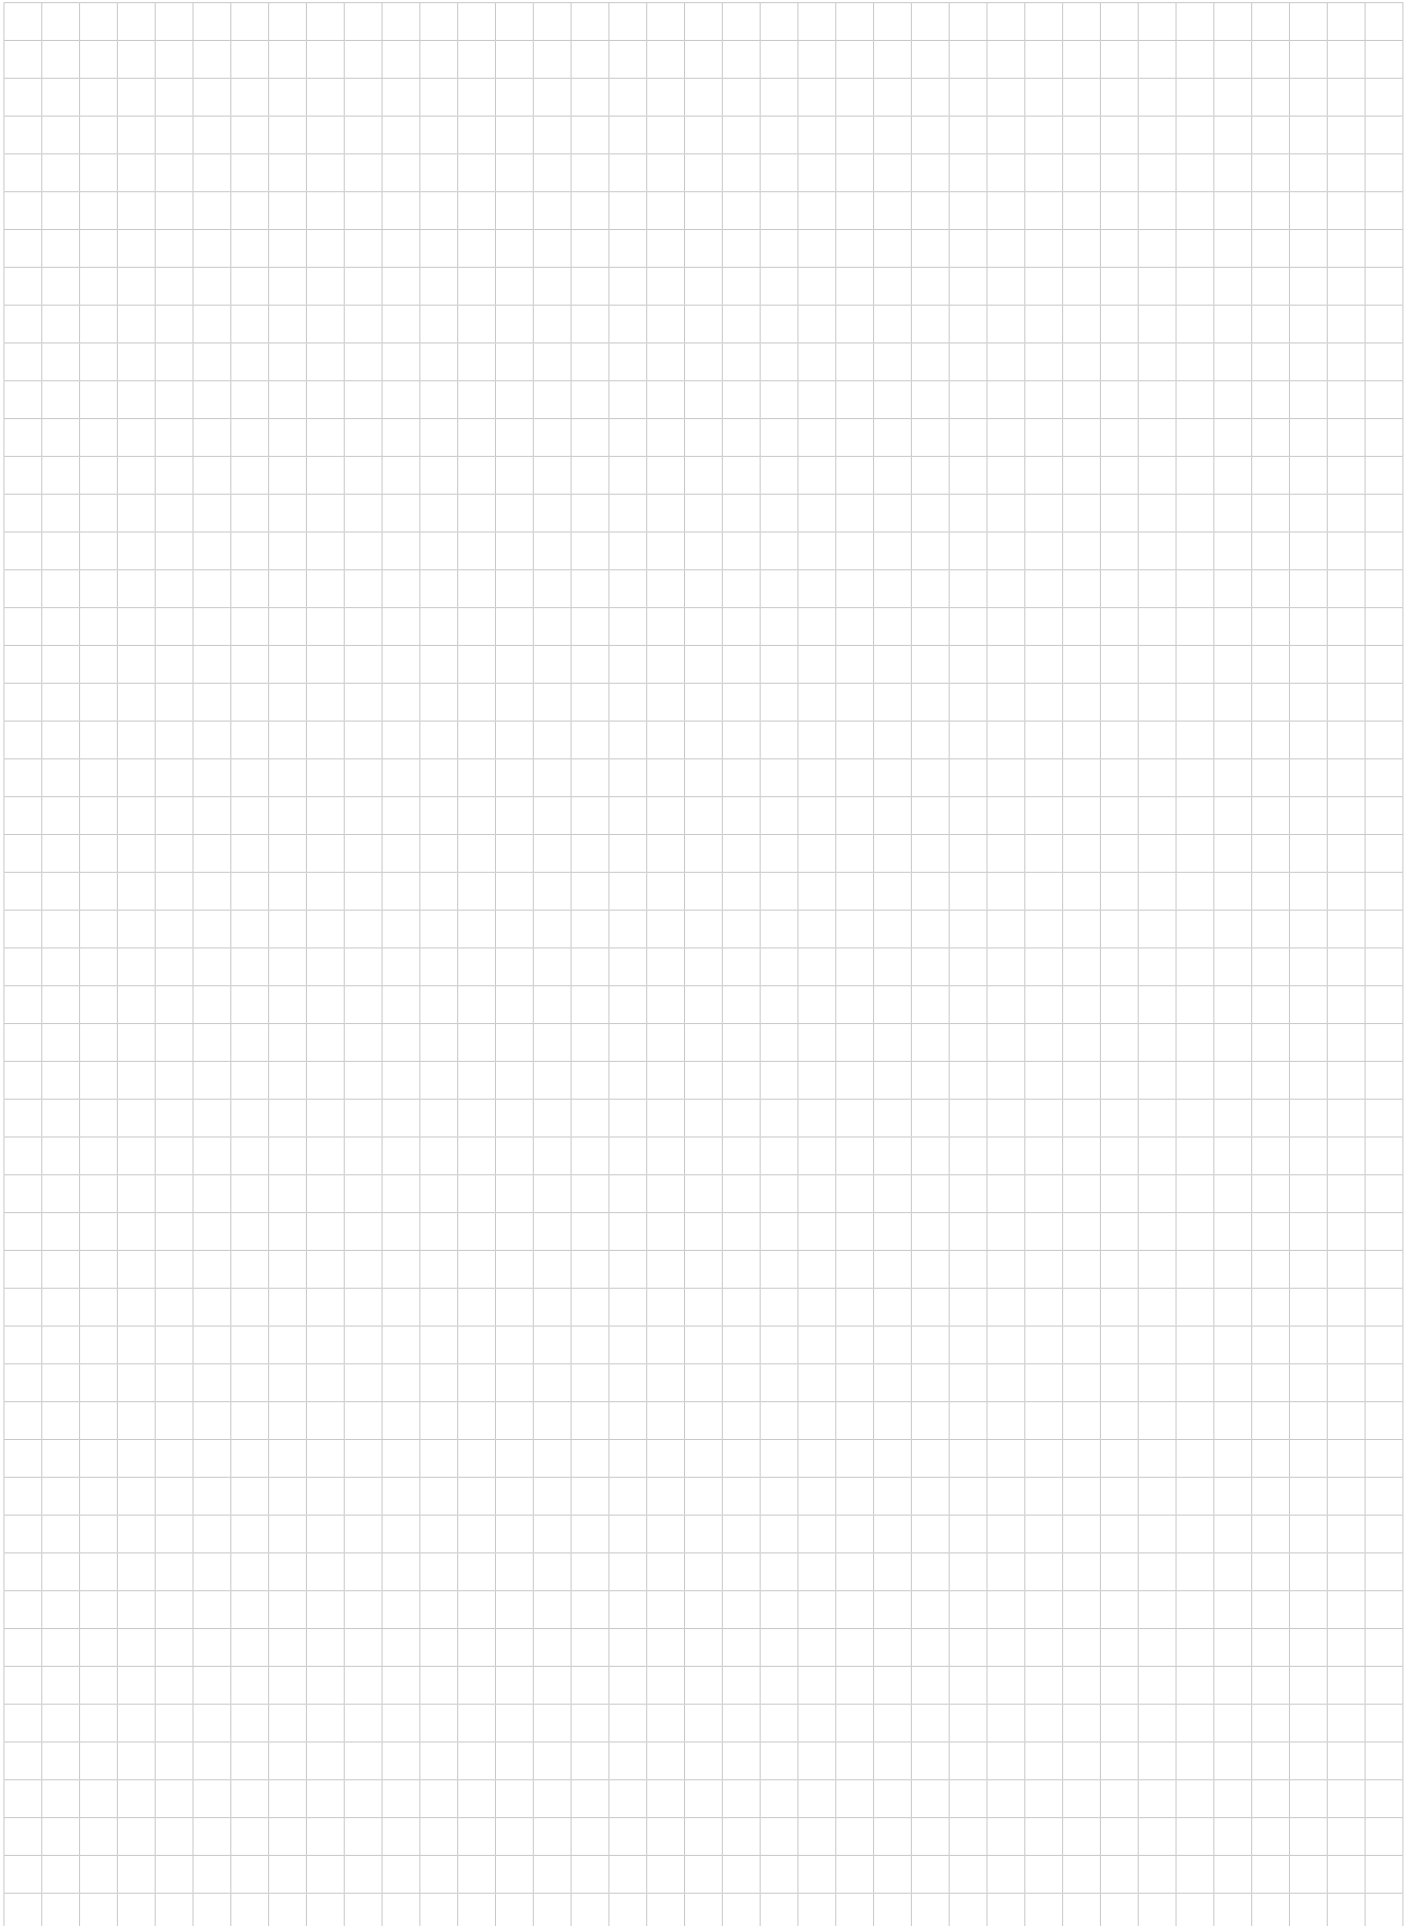

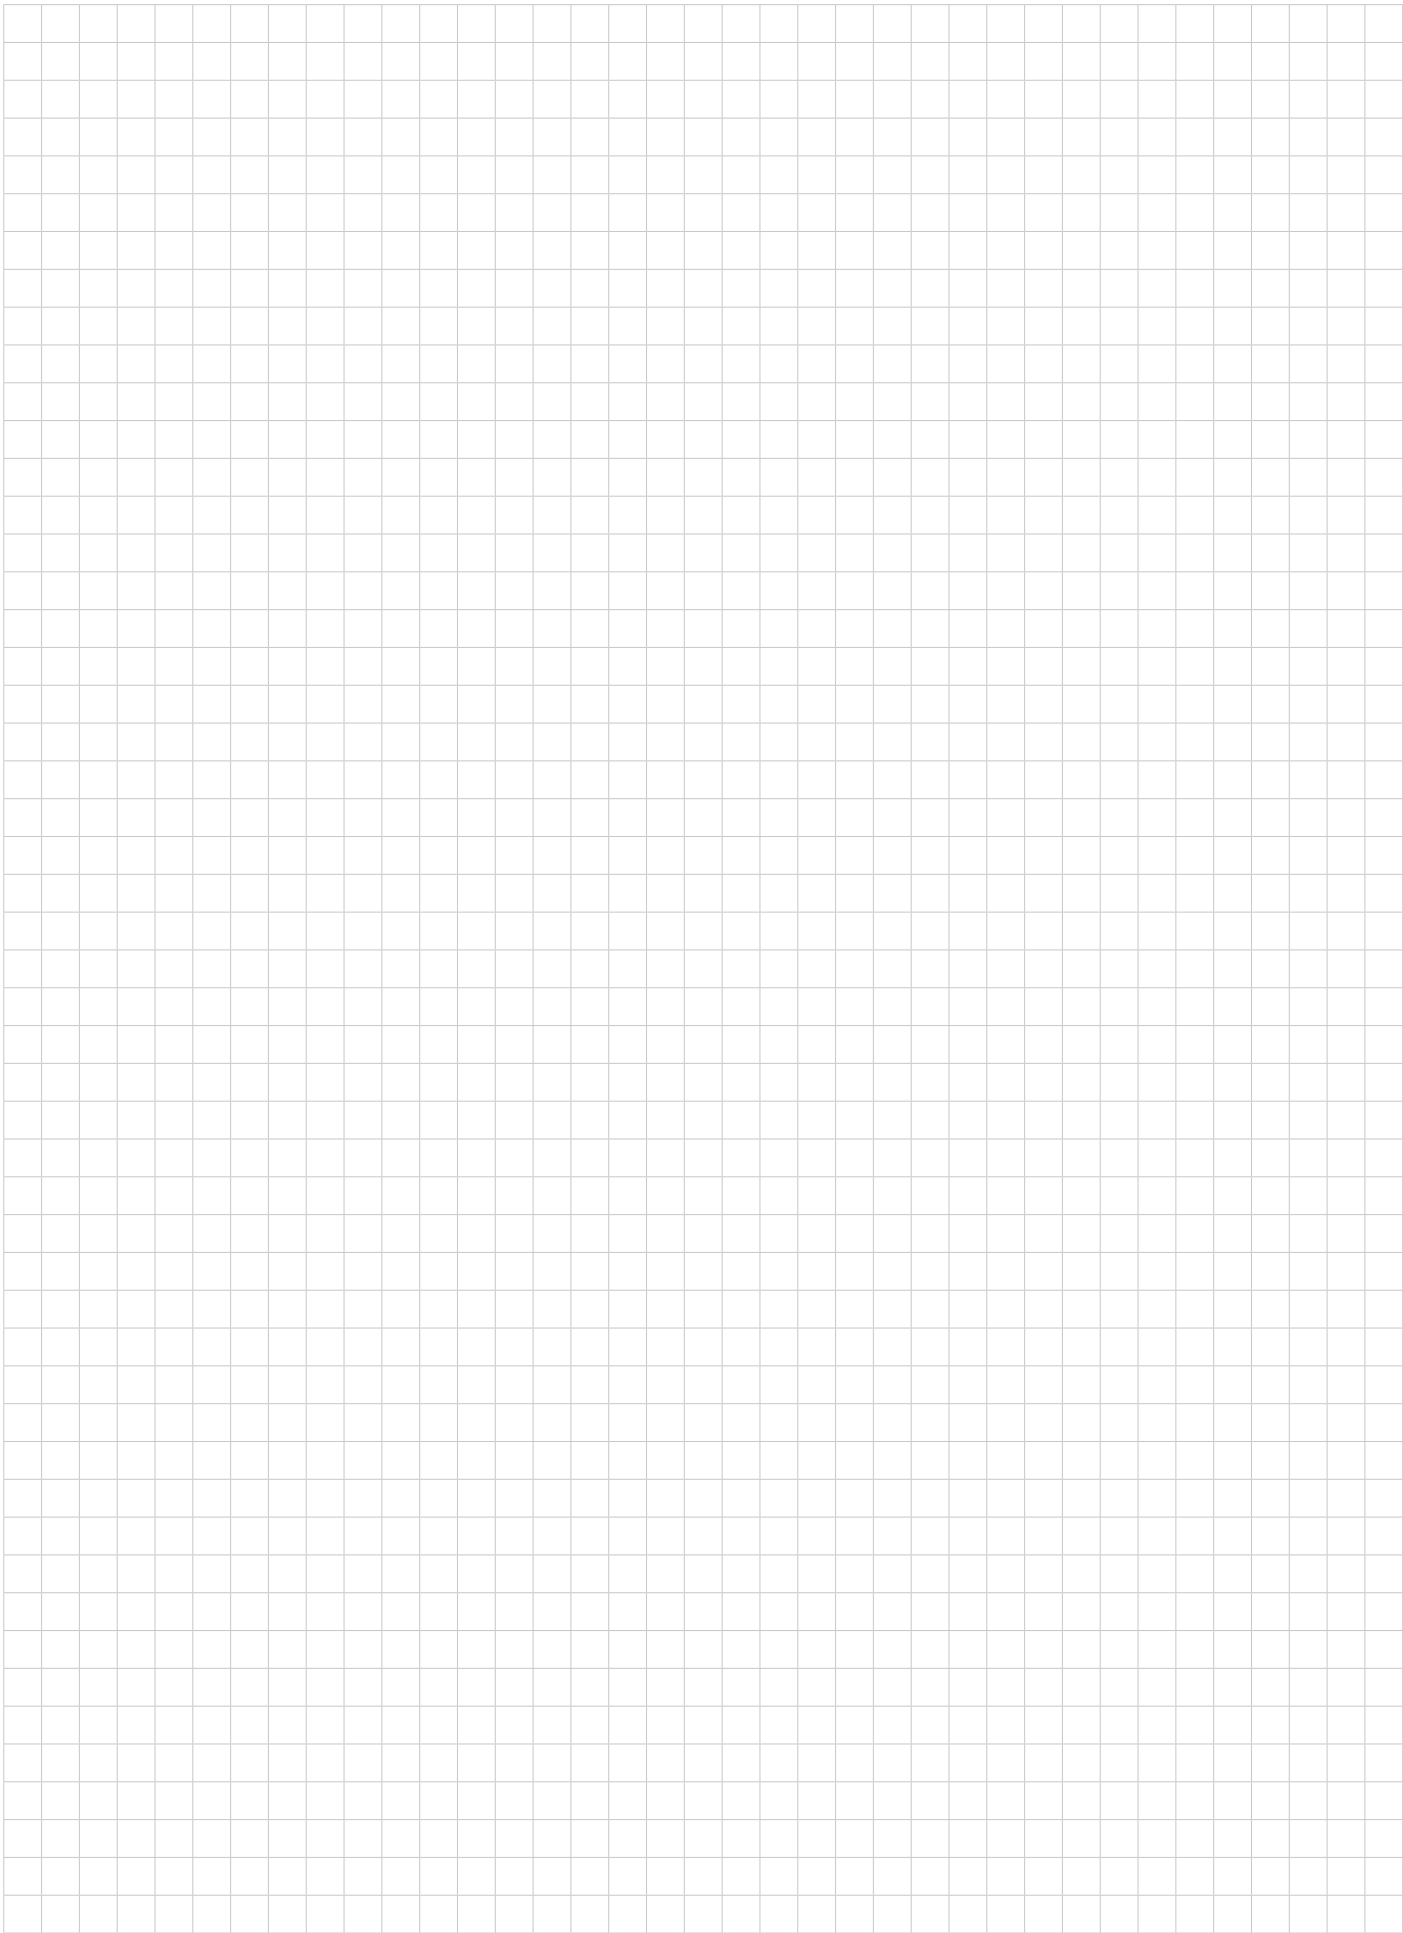

WIPER Sp. z o.o.
ul. Wyzwolenia 27
43-190 Mikołów

+48 (32) 738 5000
poczta@wiper.pl

www.wiper.pl